


HIGH PERFORMANCE SPECIALTY POLYMER SIDING SYSTEM

A look that lasts forever



Widest selection of solid colors on the market.

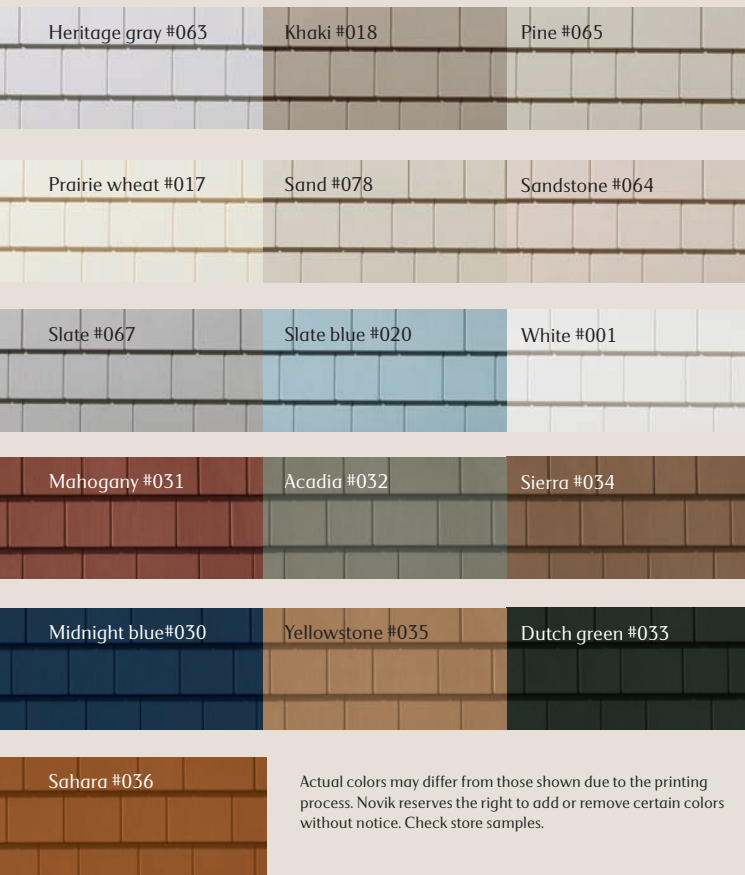

Actual colors may differ from those shown due to the printing process. Novik reserves the right to add or remove certain colors without notice. Check store samples.



Phone: 418.878.6161 Toll-Free: 888.847.8057

info@novik.com

www.novik.com

460080001A / Printed in Canada

NOVIPRO™ PERFECT SHAKE PANEL FAST-FIT

The distinctive charm and richness of real wood without the maintenance





NOVIPRO™ PERFECT SHAKE PANEL FAST-series FIT

The distinctive charm and richness of real wood without the maintenance

Ideal for either new construction or remodeling. Home owners and builders will appreciate the seamless authentic look of this triple 5 Perfect Shake siding system.

The NOVIPRO™ Perfect Shake siding system can reproduce anywhere the look of homes found on the coast line of New England without the costly maintenance associated with real wood.

Its 75"- long interlocking panels make installation fast and as easy as that of regular vinyl siding.

Testing performed

Test	Standard testing	Result for NOVIPRO™
Fire rating	In accordance with E84	Class C fire resistance
Impact	In accordance with ASTM3679	Pass
Accelerated U.V. exposure	In accordance with ASTM1435	Virtually no fading
Wind	In accordance with ASTM5206	> 160MPH


* Certified testing reports by independent laboratories




New Performance Features



- The Novipro™ Perfect Shake siding system is the ideal choice for those who want a seamless and bolder look on their house, competitive pricing, and an alternative to regular vinyl siding and wood composite siding products.
- Longer panel for faster installation.
- Made of injection molded copolymer for superior quality.
- Resists warping and impact at extreme temperature variations.
- Standard color-thru panel with U.V. stabilizer to prevent discoloration.
- Accessories available in matching colors (ex. Corners, starter strips, J-channels)
- Easy to install.




Color-thru
No paint required-ever
Virtually maintenance-free



1 Nail locators that facilitate installation by indicating precise nail locations.




Centered nailing hole to secure the panel.




Deep wood grain for a more natural look and nicer shadow lines. All exposed surfaces feature a grain texture for a more authentic look.

4 Angle that facilitates insertion.

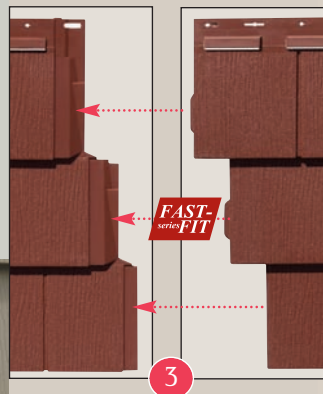

Superior interlocking system designed and tested to withstand hurricane windload.

3 Panels are held securely in place with extra long lock tabs that engage easily for faster and easier installation.



2 Expansion wall inside the tabs that allows for horizontal expansion. No need to follow the temperature guide.

Dimensions
(15" x 75" / 38 cm x 190.5 cm)
15 panels / approx. 100 square feet per carton

